

#### ZHEJIANG HANGCHA IMP. &EXP. CO., LTD.

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com



Facebook











HANGCHA GROUP CO., LTD. reserves the right to make any changes without  $notice\ concerning\ colors,\ equipment,\ or\ specifications\ detailed\ in\ this\ brochure,\ or$ to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



# **A Series 3 Wheel Electric Forklift Truck**

with capacities of 1,300 to 2,000kg



The World of Hangcha






Customer can order A series 3W 1.6-2.0t with lithium battery power from HANGCHA now.
Lightweight design, flexible, high level of energy efficiency, maintenance-free, provide long service life.



# INNOVATIVE SOLUTIONS NEW POWER NOW

Innovative, reliable lithium-ion technology (Lithium Iron-Phosphate), which are developed jointly by HANGCHA and CATL. Battery cells and modules are from CATL, with reliable quality, exclusively for HANGCHA.

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / The module uses an aluminum alloy frame which is sturdy, lightweight and with excellent heat dissipation.
- / Safe and effective: Charging efficiency as high as 98%, thermal runaway temperature 600 °C or above.
- / Adapted to low temperatures: Comes standard with an electrical heating feature, ensuring normal operation in low temperatures.
- / Quick charging: Can charge and operate at the same time, fully charged in 2hours.
- / Long-working: 4000 charging cycles, capacity retention greater than 80%.
- / Maintenance-free: Battery does not require manual maintenance.
- / Green and clean: Pollution-free, zero emissions.

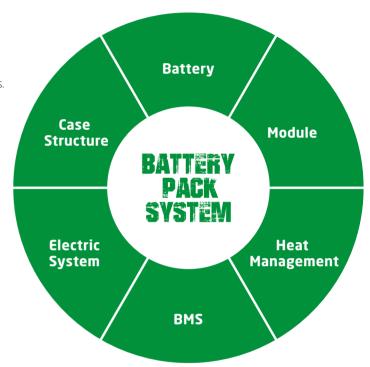



Lead-acid batteries
8-10 hours 100%

# Rapid charging and opportunity charging ensure continuous availability of vehicles

Li-lon powered forklifts are always available. They allow for fast full charging or boost charging (100 % charge in 2 hours).

They are maintenance free and do not require a battery change when used for multi-shift operations.



**TITANS CHARGER** 



# **Appearance**

/ Compact design meets the limited space operation requirement. Eyeball catching designed smooth outline and metal material applied for exposed parts, all provide robust construction of the A series three-pivot electric counterbalance forklift truck.

# Maneuverability

/ Front dual separated driving motors can realize the wheels forward or backward independently, the small turning radius is suitable for narrow channel; Imported reducer, high power driving motor provides a reliable and strong performance.

# **High Efficiency**

energy saving and effectively.

 / High power pump motor and low noise gear pump, both improve the lifting speed and work efficiency.
 / Regenerative braking during deceleration is more

#### **Comfort**

/ Thanks to the new designed adjustable levers, the operator can work more comfortable. New designed dashboard is easy to see and provides friendly human-computer interaction and with running hours, self diagnosis functions and the battery power show.

/ Both the steering column and seat can be adjusted easily, every operator can find the best driving position.

/ Low vibration and suspension seat reduce the driver's fatigue.

# **Stability**

- / Sinking type battery layout provides good stability especially during cornering.
- / The soft landing system protects the forks from dashing against the ground.

# **Safety**

- / Emergency switch is standard specification which meets the Euro safety regulation.
- / Both electronics and hydraulic system are equipped with overloading protection system.
- / Driving speed is automatically reduction during cornering.

## **Maintenance**

- / Full opened battery cover is easy for battery service and changing.
- / The service engineer can remove the front floor board without any tool, it is convenient for the maintenance.

#### **Advance**

- / World famous controller, connectors, battery plug and emergency switch are applied to ensure the reliability of the performance and provides easy service.
- / High frequency MOSFET integrated control system provides accurate control of travelling, lifting and better adjustable performance that better matchs with the motor. No roll-back on ramp is also provided thanks to MOSFET controller. Motor brake is for regenerative braking during deceleration, direction changing, and downward slope.

### **Standard Specification**

- / High efficiency AC driving motor
- / Multi-functions instrument
- / Front dual driving motors
- / Rubber floor mat
- / Solid tyre
- / Emergency disconnect switch
- / 2-valve inside chassis
- / LED headlight
- / Rear combination LED light
- / Panoramic rearview mirror (in the middle position of the overhead guard)
- / 3 meters duplex wide view mast
- / Adjustable steering column
- / Full electronic controlled travelling, lifting and steering
- / Horn and reversing buzzer
- / Toolbox and file folder
- / CAN-BUS system
- / Low noise gear pump (Brand: Shimadzu, Made in Japan)
- / Full hydraulic steering
- / Soft landing system
- / Non suspension seat: Grammer GS12 with switch
- / ZF reducer and SCHABMULLER traveling motor

# **Options**

- / 3rd or 4th hydraulic function
- / 2.5-4.5 meters duplex mast
- / 4.3-6.5 meters triplex mast
- / Rear working LED light
- / Reversing assist grip with horn button
- / Integrated sideshifter
- / Other attachments
- / Other dimension forks
- / Special carriage and backrest
- / Big capacity battery
- / CATL lithium battery pack

- / Non-marking tyre
- / Battery charger
- / Battery side roll-out (Using pallet truck or trolley)(Not for Lithium battery)
- / Fingertip control on the adjustable armrest
- / Cold store protection(Not for Lithium battery)
- / Suspension seat
- / Full closed cabin
- / Socket for other equipment
- / Blue spot light
- / OPS system





ront dual senarated motors



Panoramic rearview mirror



Cover can be easily opened by adjusting the levels forward



he small turning radius is suitable for arrow channel